

GVL 8304-K



Performance features

- » Compact ventilation control panel
- » For controlling 24 V DC window drives
- » Up to 4 A total drive current
- » 1 ventilation group
- » Input for external controller, e.g. timer
- » Configurable ventilation safety function (storage operation OPEN / CLOSED)
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Surface-mounted plastic housing

Accessories


Operation elements



Weather sensors



Example of application

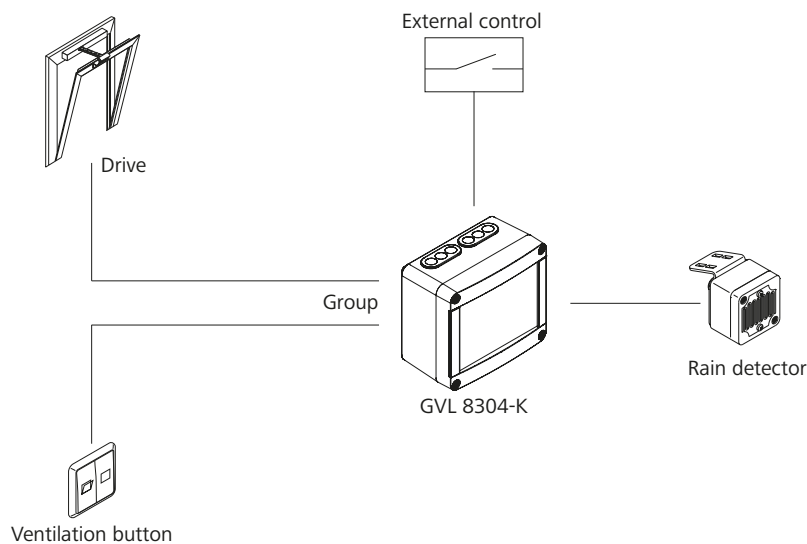

Technical data

	GVL 8304-K
Supply	230 V AC / 50 Hz / 120 VA
Stand-by power	4.3 W
Output	24 V DC / 4 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 50
Temperature range	-5 °C ... +40 °C
Housing	Plastic
Colour	Light grey (~ RAL 7035)
W x H x D	172 x 151 x 95 mm
Weight	2.00 kg

Approvals / Certificates

Article also available with the following permissions under other article numbers. Technical data may deviate. Find out about permission details from your D+H Partner.



Design

Type	Art. No.
GVL 8304-K	30.202.10