

SHD 54 / SHD 54-BSY+ Set



Performance features

- » For opening and closing wide side-hung vents
- » For sash sizes to 1.2 x 1 m (SHD 54) / 1.2 x 2 m (SHD 54-BSY+ Set)
- » Synchronised dual chain drive set (SHD 54-BSY+ Set)
- » With motor electronics controlled via microprocessor
- » Opening the windows to 65° in less than 30 sec.
- » Locking mechanism for the window in conjunction with window locking drive (optional)
- » Configurable locking direction on the drive
- » Programmable drive functions and different drive parameters
- » Bracket set included

Approvals / Certificates


Find out about permission details from your D+H Partner.

Article also available with the following permissions under other article numbers. Technical data may deviate.




Potential drive options

You can find the explanations for the icons on the last page.



Dimensions

All specifications in mm

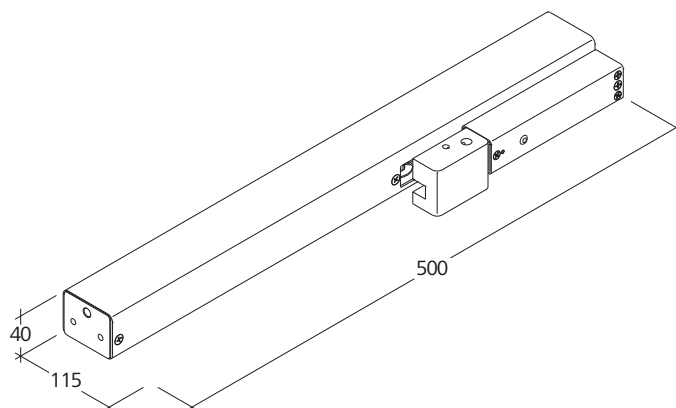

Technical data

Specification per drive

	SHD 54	SHD 54-BSY+ Set
Supply	24 V DC / $\pm 15\%$ / 1 A	
Duty cycle	30 % (ON: 3 min. / OFF: 7 min.)	
Force of pressure	500 N	
Tensile force	500 N	
Service life	20000 double strokes	
Stroke	450 mm	
OPEN running speed	11.8 mm/s	
OPEN running speed - SHEV	15.2 mm/s	
CLOSED running speed	11.8 mm/s	
Type of protection	IP 50	
Emission sound pressure level	$L_{pA} \leq 70 \text{ dB(A)}$	
Temperature range	$-15\text{ }^{\circ}\text{C}$ ($-5\text{ }^{\circ}\text{C}^*$) ... $+75\text{ }^{\circ}\text{C}$	
Fire resistance	B300 (30 min / $300\text{ }^{\circ}\text{C}$)	
Housing	Aluminium	
Surface	Powder-coated	
Colour	White aluminium (~RAL 9006)	
Connection	2.5 m silicone cable	
W x H x D	500 x 40 x 115 mm	
Weight	2.10 kg	

* In accordance with VdS 2580

Design

Type	Art. No.	Stroke	Remark
SHD 54/450-BSY+ Set	23.050.80	450 mm	
SHD	26.501.00	450 mm	Variable equipment possible



HS "High speed"

In the case of SHEV, the high-speed function is used for reliably reaching the defined end position in 60 s. In daily ventilation mode, the drive runs quietly and quickly, as usual.



Function programming

Option for customised configuring of drive parameters (e.g. stroke) via software and associated service tools for drives equipped with PLP, BSY or BSY+ electronics.



BRV signal

Acknowledgement from the drive, via a control cable, to confirm that it has been completely extended or retracted. When used with the AT 41 and ERM 44 modules, this signal is sent to the central building control system, the modules themselves, or to the locking drive. The BRV signal is not isolated.



ACB (Advanced Communication Bus)

Enables direct bus communication between the controller and the drive for, for example, control with perfect positioning or drive feedback. Communication is via the open source Modbus protocol, and it enables the drive to be combined with an ACB-capable control panel or enables it to be directly connected to higher-level controllers such as a building management system.



BSY+ (synchronisation of drives)

BSY+ enables communication and synchronisation between different components in the window. For example between the chain drives, during synchronous operation, or between window and locking drives (e.g. FRA 11 BSY+ or VLD-BSY+).



SGI signal (position reporting)

In combination with the D+H servo plug-in unit SE 622 or the BSY-gateway BSY-GW-024-010-U, the drives can be controlled with perfect positioning.



SKS (closing edge protection)

Drive option, which enables an anti-trap strip or presence detector to be connected directly to the drive (terminal resistor 5.6 kΩ).



Audible signal (corresponding to protection class)

AS2 corresponding to "Protection class 2" in accordance with ZVEI risk assessment through an audible warning signal in the "CLOSED" running direction. AS3 corresponding to "Protection class 3" in accordance with ZVEI risk assessment, in addition to AS2, stops the drive for 11 s with a remaining stroke of 28 mm.



End position message (OPEN / CLOSED)

Drive feedback via an integrated isolated switching contact. This happens if the chain / rack and pinion has moved completely out or in.



SBD side bow chain

Drive chain with rigid backing, bends in the direction of the hinge. Drive is fixed in place (not rotatable).



SBU side bow chain

Drive chain with rigid backing, bends in the direction of the hinge. Drive is fixed in place (not rotatable).



WS (use in swimming pool)

Available as an option for rack and pinion drives to make them suitable for use in swimming pools. The drive is equipped with an A4 rack and pinion, A4 eyebolt and a gearbox with hardened stainless steel pinion.



W (use outdoors)

Available as an option for rack and pinion drives to make them suitable for outdoor use. The drive is equipped with a pressure release vent (depending on installation), condensation protective coating on the electronics and a gearbox with hardened stainless steel pinion.